


A+++

KAISAI

# PRO HEAT

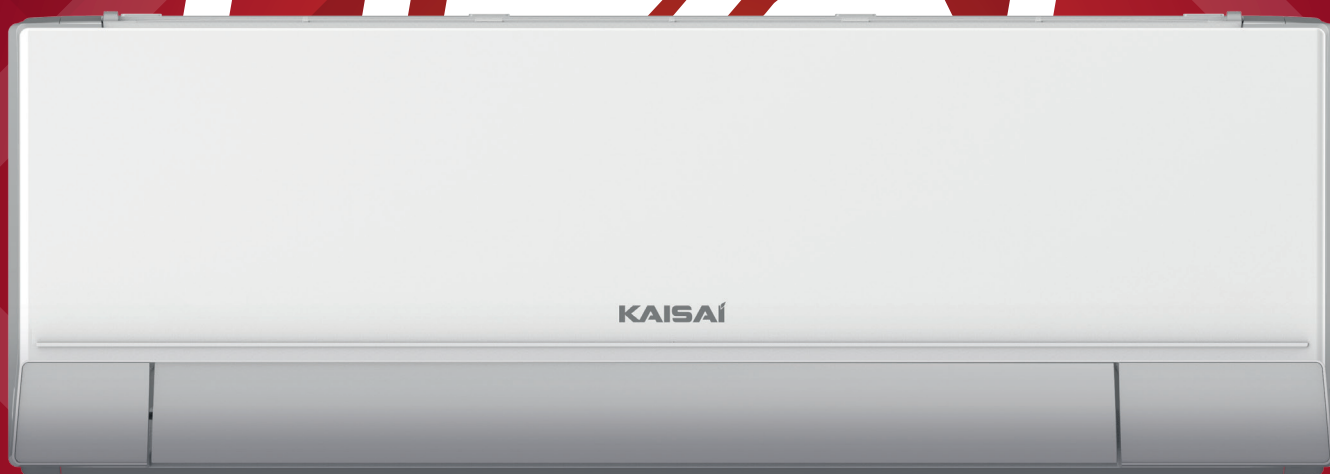

BIO HEPA  
FILTER



FILTERCOLD  
CATALYST FILTER



AIR IONIZATION

## Energy-efficient and reliable heating

Extremely high energy efficiency coefficients  
and the ability to efficiently heat rooms at outdoor  
temperatures as low as  $-25^{\circ}\text{C}$ .



WIFI MODULE  
AS STANDARD



ECO-FRIENDLY  
REFRIGERANT R32



MULTIFUNCTIONAL  
REMOTE CONTROL



WIDE TEMPERATURE  
RANGE



## COLD CATALYST FILTER

Using specialized filtration, the air conditioner not only cools and heats, but also effectively purifies the air. The cold-CATALYST filter removes chemicals such as carbon monoxide, hydrogen sulfide, ammonia, benzene and formaldehyde.



## BIO HEPA FILTER

The air purification function is supported by a Bio HEPA filter that effectively traps 99% of dust particles, dust, and bacteria with a size of 0,3 µm and up to 95% of particles from 0,1 to 0,3 µm, including fungal cells and some viruses.




## AIR IONIZATION

The ions emitted by the air conditioner break down dust mite particles, mold, bacteria, and viruses, eliminating them from the environment. An additional effect of the air conditioner is moistening the air, which has a positive impact on the skin and gives a pleasant feeling of freshness in the air-conditioned room.

## TECHNICAL SPECIFICATION - KAISAI PRO HEAT

MODEL	indoor unit		KRP-09MEHI	KRP-12MEHI	KRP-18MEHI	KRP-24MEHI
	outdoor unit		KRP-09MEHO	KRP-12MEHO	KRP-18MEHO	KRP-24MEHO
Average output. (min÷max)	cooling	kW	2,7(1,3-3,8)	3,5(1,3-3,9)	5,3(3,7-6,1)	7,0(2,1-8,2)
	heating	kW	3,1(0,9-4,4)	3,9(0,9-4,5)	5,6(2,6-6,7)	7,3(1,6-8,2)
Energy class	cool./heat		A+++ / A++	A+++ / A++	A+++/A+	A+++/A+
SEER	medium	W/W	8,6	8,5	8,5	8,5
SCOP	medium	W/W	4,6	4,6	4,3	4,2
Aver.power consump. (min÷max)	cooling	W	600(130÷1200)	880(130÷1250)	1318(587÷1787)	1760(420÷3200)
	heating	W	690(120÷1400)	990(120÷1450)	1500(943÷1695)	1975(300÷3100)
Aver.working current (min÷max)	cooling	A	2,66(0,6÷5,35)	3,9(0,6÷5,55)	5,73(2,81÷7,90)	7,7(1,8÷13,9)
	heating	A	3,05(0,6÷6,2)	4,4(0,6÷6,4)	6,52(4,26÷7,50)	8,6(1,3÷13,5)
Air flow	indoor	m³/h	530/360/280	560/380/290	685/580/400	1092/724/379
	outdoor	m³/h	2200	2200	3500	3500
Working temp. cooling/heating*	indoor	°C	16÷32/0÷30	16÷32/0÷30	16÷32/0÷30	16÷32/0÷30
	outdoor	°C	-15÷50/-25÷24	-15÷50/-25÷24	-15÷50/-25÷24	-15÷50/-25÷24
Sound pressure lvl	indoor	dB(A)	37/32/21,5/20,5	40/33/22/21	41/35/23/22	44,5/40/33/21
	outdoor	dB(A)	57	57,5	56	58,5
Net dimensions s/w/g	indoor	mm	795x295x225	795x295x225	965x319x239	1140x275x370
	outdoor	mm	805x554x330	805x554x330	890x673x342	890x673x342
Transport dimensions s/w/g	indoor	mm	870x370x305	870x370x305	1045x400x325	1230x455x355
	outdoor	mm	915x615x370	915x615x370	995x740x398	995x740x398
Net weight	indoor	kg	10,2	10,2	12,3	20,0
	outdoor	kg	28,4	28,4	38,8	45,6
Transport weight	indoor	kg	13	13	16,4	25,3
	outdoor	kg	31,0	31,0	41,9	48,8
Pipe dia. fluid/gas		mm	6,35/9,52	6,35/9,52	6,35/12,7	9,52/15,9
Max. installation length		m	25	25	30	50
Max. level difference		m	10	10	20	25
Power supply	outdoor	V/Hz/Ph	220-240/50/1	220-240/50/1	220-240/50/1	220-240/50/1
Protection	outdoor	A	10	16	16	20
Power cables	outdoor	il. żył	3x1,5	3x1,5	3x2,5	3x2,5
Control wires	indoor - outdoor	x mm²	5x1,5	5x1,5	5x1,5	5x1,5
Factory refig. charge	up to 5 LM	kg	0,69	0,69	1,1	1,5
Addit. refig. charge	over 5 LM	g/m	12	12	12	24

## THE SET INCLUDES



Indoor unit  
**KRP**



Outdoor unit  
**KRP**



Wireless  
remote control  
**RG10A1**



## SIMPLE MAINTENANCE

The air conditioner comes with a heavy-duty mounting plate, and the moulded casing provides ample space for pipes and wiring, greatly reducing installation time.



## COMPRESSOR AND CONDENSATE TRAY HEATER

The compressor's crankcase heater prevents absorption of the refrigerant by oil, which can occur when the temperature drops. The drip tray heater assists the air conditioner's operation in heating mode by preventing ice build-up, improving efficiency and minimising the risk of fan failure.



## WIRED CONTROLLER (OPTION)

In addition to the standard wireless remote control, there is an option of connection via wired remote control.



## GEAR MODE

Thanks to the possibility of adjusting the temperature and fan speed in Gear mode you can control power consumption by setting the maximum level of intensity of the device.



## ECO MODE

With enabled Eco function, the air conditioner automatically adjusts the temperature and fan speed to maximize energy efficiency. This reduces energy consumption, saving more than 60% compared to standard operation.



## 3D AIR FLOW

The automatically controlled horizontal and vertical louvers of the air conditioner ensure optimum air circulation and an even temperature distribution in the room.